


uIBX-210-CV-N2600

Fanless embedded system with Intel® Atom™ N2600 DC 1.6GHz, Intel® NM10 chipset, 2GB DDR3 memory



Features


- ◆ Slim and compact embedded system design with Intel R 3rd Gen Atom N2600 dual-core processor , Supports DDR3 memory (System Max. 2GB)
- ◆ 12V only single voltage design, supports AT/ATX power mode selection
- ◆ Flexible VGA and HDMI with dual-display support
- ◆ Support PCIe Mini card slot (compatible with mSATA device)
- ◆ Fully I/O with four USB, one VGA, one HDMI, three COM and audio

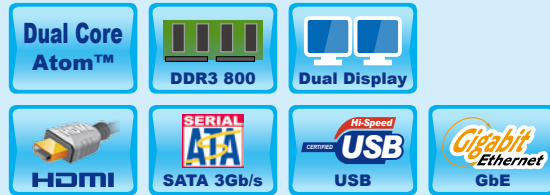

Specifications

Model Name	uIBX-210-CV-N2600-R10		
Chassis	Form Factor	uIBX	
	Color	Silver	
	Dimensions	142mm x 121mm	
	PCB	10-layer PCB	
Motherboard	CPU	Intel® N2600 1.6GHz dual-core processor, TDP=3.5W	
	System Chipset	Intel® NM10, TDP=1.5W	
	BIOS	UEFI BIOS	
	Memory	2GB DDR3 800MHz (N2600 supports up to 2GB)	
	Chipset Graphics Engine	Intel® GMA 3600, 400 MHz core speed for N2600	
	Expansion	1 x PCIe Mini card slot (compatible with mSATA device)	
	Audio	Realtek ALC662 HD Audio codec Line-out and mic-in audio jack	
Storage	HDD	2.5"	
System Function	Display Output	Support HDMI, VGA for dual independent display Display 1: Analog CRT up to 1920x1200 for Cedarview-M, support CRT hot plug Display 2: HDMI up to 1920 x 1080	
	Ethernet	1 x RJ-45 LAN by Realtek RTL8111E GbE	
	Super I/O	Fintek F81866	
	COM Port	1 x RS-232 (COM 1) 1 x RS-232/422/485 (COM 2) 1 x RS-422/485 (COM 3)	
	Indicators	HDD LED / Power LED indicator	
	Front I/Os	1 x HDMI 1 x VGA 2 x USB port 1 x Audio & Speaker Jack	
	Rear I/Os	2 x USB port COM 3 (RS-422/485) COM 1 (RS-232) COM 2 (RS-232/422/485) 1 x LAN	
	Power	Power Supply	AT/ATX support Power input: +12V only Locking type DC-in jack on board (rear side)
	Reliability	Watchdog Timer	Software programmable 1~255 sec. system reset
		Hardware Monitor	Fintek 81866
Operating Temperature		0°C ~ 50°C with air flow	
Power Consumption		+12V @ 1.57A (Intel® Atom™ N2600 dual Core 1.6GHz , DDR3 800 2GB memory)	
Chassis Construction		Aluminum Alloy, ABS	
Dimensions		146.6mm x 132mm x 45.2mm (DxWxH)	
OS	Mounting	VESA 75	
	EMC/Safety	CE, FCC class A	
	Supported OS	Microsoft® WES7E Microsoft® Windows® XP Embedded Microsoft® CE 6.0	

Dimensions (Unit: mm)

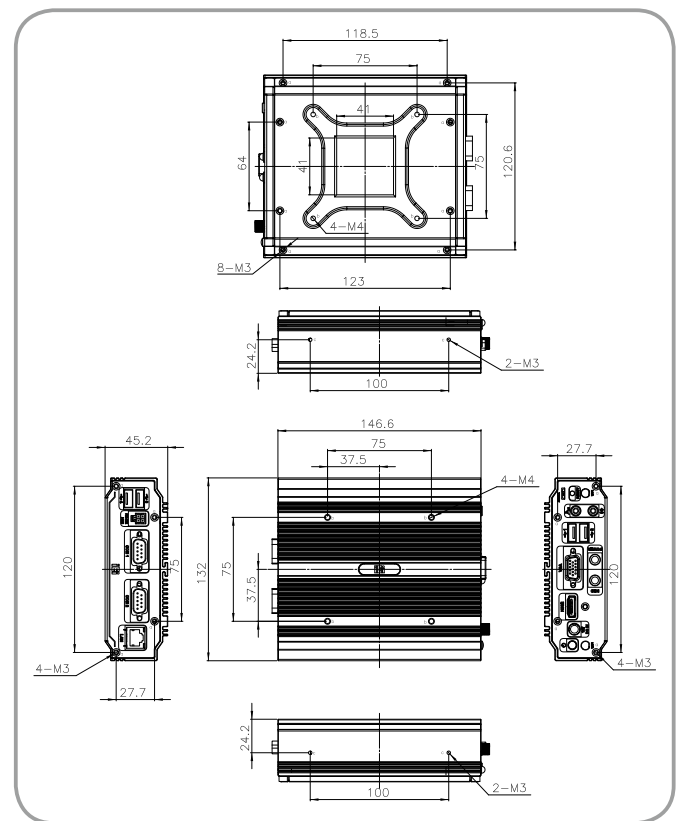

Packing List

1 x uIBX-210-CV-N2600-R10	1 x One Key Recovery CD
1 x Adaptor 12V/5A	1 x Utility CD
1 x Screw set	1 x QIG (Quick Installation Guide)

Ordering Information

Part No.	Description
uIBX-210-CV-N2600/2GB-R10	Fanless embedded system with Intel® Atom™ N2600 DC 1.6GHz, Intel® NM10 chipset, 2GB DDR3 memory, 12VDC-In, with 60W power adaptor PSE adaptor, black, RoHS
uIBX-210W-CV-N2600/2GB-R10	Fanless embedded system with Intel® Atom™ N2600 DC 1.6GHz, Intel® NM10 chipset, 2GB DDR3 memory, built-in 2T2R 802.11b/g/n wireless, 12VDC-In, with 60W power adaptor PSE adaptor, black, RoHS
UIBXVK-210B	VESA 75 mount kit for uIBX-210, black
VK-75100B	VESA mount 75 to 100 adapter, black