

EE35 Series

Industrial Transmitter for Dew Point Measurement

Exact dew point monitoring is increasingly playing a more important role in many industrial applications, such as drying processes, air pressure pipelines, etc. For these purposes the multifunctional EE35 Series offers the ideal features.

The EE35 Series is based on a functional, user-friendly housing concept and on the proven polymer humidity sensors of the HC Series.

A specially developed autocalibration process enables measurements in a measurement range of -60...60°C Td (-76...140°F Td), with a Td measurement accuracy of ±2°C (±3.6°F).

Two freely configurable and scaleable analogue outputs are available for the two measurement values (Td, T).

An optional hygrostat output, which can be set by means of a potentiometer, provides an alarm signal in a simple way when a threshold of the permitted dew point is exceeded.

An optional display for the measurement values and the associated MIN/MAX values allows a quick overview of the current situation.



Autocalibration

Dew points in the range of -60...-20°C (-76...-4°F) at room temperatures correspond to relative humidity values of 0.08...5.37% RH. The measurement of such low humidity values is not possible with conventional capacitive measurement methods. For the EE35 Series, a special autocalibration process is used to compensate for the usual drift effects and thus to achieve high accuracy measurements also at -60°C Td (-76°F Td).

Installation

In addition to the direct mounting of the dew point probe, a ball valve installation enables the mounting and removal of the probe without having to interrupt the running process.

Alarm Output

An optional alarm module with one relay output is available for control and alarm purposes. The setting of the Td threshold can be easily done with the potentiometer on the printed circuit board.

Typical Applications

- industrial processes
- monitoring of air pressure pipelines
- warehouses
- drying processes
- paper industries
- chemical industries

Features


- measuring range -60...60°C Td (-76...140°F Td)
- accuracy of measurement ±2°C Td (±3.6°F Td)
- alarm output for dew point
- autocalibration

Housing Dimensions (mm)


Installation Example

Housing:

polycarbonate housing

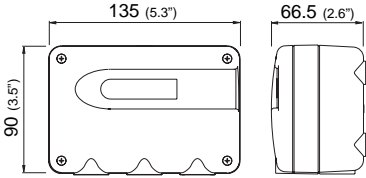


metal housing **NEW**

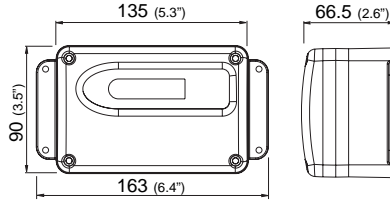

For use in harsh industrial environments the EE35 series is available in a robust metal housing.


Model:

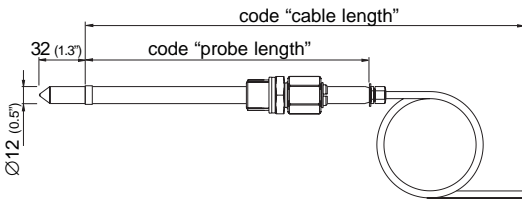

EE35-xEx
Remote probe for T up to 60°C (140°F)
and pressure-tight up to 10bar (145psi)
Probe material: stainless steel




minimum installation depth

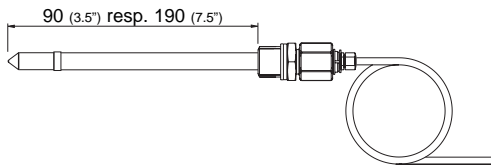


maximum installation depth

ball valve installation (pressure-tight up to 10bar/145psi)

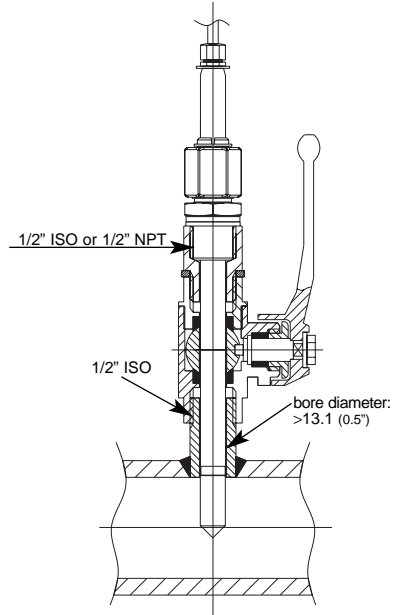


fixed installation (pressure-tight up to 10bar/145psi)

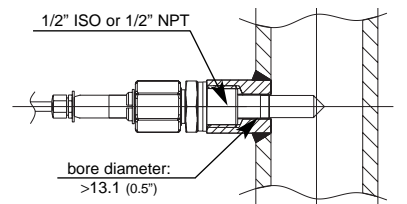

Connection Versions


Standard



M16 x 1.5

transmitter	1xM16
transmitter incl. alarm output	2xM16


Plug Option C03



Lumberg RKC 5/7

Power supply +
Analogue output

Plug Option C09



Lumberg RKC 5/7

Lumberg RKC 4/3/7

Power supply +
Analogue output

alarm output

Technical Data

Measuring Quantities

Dew point

Humidity sensor

Measuring range

(below 0°C / 32°F the transmitter outputs frostpoint)


Accuracy

HC1000-400

standard calibration: -40...60°C (-40...140°F)

special calibration: -60...60°C (-76...140°F)

≤ ±2°C (≤ ± 3.6°F)

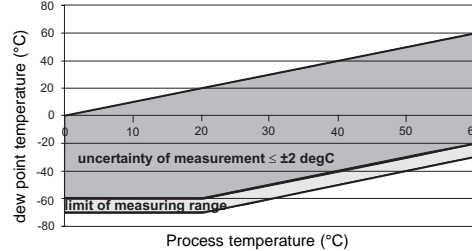

Response time t_{90}

80 sec. -20°C → -40°C (-4°F → -40°F)

10 sec. -40°C → -20°C (-40°F → -4°F)

Temperature

Sensor

Pt1000 DIN A

Measuring range

0...60°C (32...140°F)

Accuracy of temperature measurement at 20°C (68°F)

±0.2°C (±0.36°F)

Sensitivity error at full scale

±0.1°C (±0.18°F)

Temperature dependence of electronics

< 0.005°C/°C

Outputs

Two freely selectable and scaleable analogue outputs
 xx...yy°C T, Td/Tf / xx...yy°C respectively

0 - 5V

0 - 10V

4 - 20mA

0 - 20mA

General

Supply voltage

SELV 8...48V DC or SELV 12...35V AC SELV = Safety Extra Low Voltage

Current consumption - voltage output

typ. 40mA, with autocalibration: 100mA

- current output

typ. 80mA, with autocalibration: 140mA

Pressure range

0...10bar (0...145psi)

Housing / protection class

PC or Al Si 9 Cu 3 / IP65; Nema 4

Cable gland

M16 x 1.5 (option: plug) cable Ø 4.5 - 10 mm (0.18 - 0.39")

Electrical connection

screw terminals up to max. 1.5mm² (AWG 16)

Sensor protection

stainless steel sintered filter

Working temperature range

probe: -40...60°C (-40...140°F)

electronic: -40...60°C (-40...140°F)

with LC display: -20...50°C (-4...122°F)

with alarm module: -40...60°C (-40...140°F)

Storage temperature range

-40...60°C (-40...140°F)

Electromagnetic compatibility according to

EN61326-1:1997 + note1:1998

FCC Part15 ClassB

ICES-003 ClassB



Technical Data for Options

Display

graphical LC display (128x32 pixels), with integrated push-buttons for selecting parameters Td or T and MIN/MAX functions


Alarm output for Td/Tf

- range: -60...40°C Td (-76...104°F Td) adjustable with the potentiometer on the printed circuit board


- 1 switch contact

- 250V AC/6A or 28V DC/6A

Connection Diagram

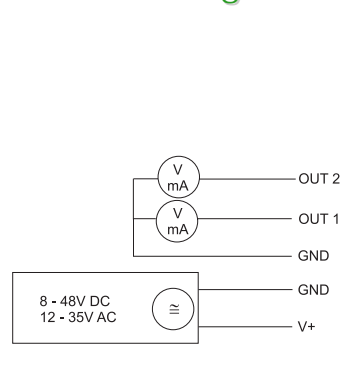

Terminal configuration - Alarm output

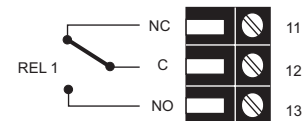

Ordering Guide EE35

EE35-

Hardware Configuration					
Housing	metal housing				M
	polycarbonate housing				P
Type	pressure tight				E
Cable length (incl. probe length)	1m (3.3ft)				01
	2m (6.6ft)				02
	5m (16.4ft)				05
Probe length	100mm (3.9")				3
	200mm (7.9")				5
Pressure tight feedthrough	1/2" male thread				HA03
	1/2" NPT thread				HA07
Display	without display				
	with display				D05
Alarm output	without relay				
	with relay				SW
Plug	cable glands				
	1 plug for power supply for power supply and outputs				C03
	2 plugs for power supply / outputs and alarm output				C09
Probe	fixed				
	pluggable				P01
Td Calibration	standard -40...60°C (-40...140°F)				
	special calibration -60...60°C (-76...140°F)				CA02
Software Configuration					
Physical parameters of the outputs	temperature	T	[°C/°F]	output 1	B
	dew point temperature	Td	[°C/°F]	output 2	C
	frost point temperature	Tf	[°C/°F]		D
Type of output signals	0-5V				2
	0-10V				3
	0-20mA				5
	4-20mA				6
Scaling of T-output	-40...60 (T02)	-60...20 (T65)	-40...100 (T79)	output T	Select according to ordering guide (Txx) Other T-scaling refer to page 11
	-50...50 (T27)	-50...100 (T66)	-40...140 (T83)		
	-80...20 (T63)	-20...70 (T73)	-60...120 (T97)		
	-60...60 (T64)	20...140 (T77)			
Scaling of Td/Tf-output	-40...60 (T02)	0...60 (T07)	-60...60 (T64)	output Td resp. Tf	Select according to ordering guide (Tdx resp. Tfx) Other T-scaling refer to page 11
	-10...50 (T03)	0...80 (T21)	32...120 (T90)		
	0...50 (T04)	-40...80 (T22)	32...140 (T91)		
	0...100 (T05)	-20...80 (T24)	32...132 (T96)		

Accessories

- | | |
|---|---|
| <ul style="list-style-type: none"> - Ball valve set (HA050101) - Stainless steel sintered filter (HA010103) - Display + housing cover in metal (D05M) - Display + housing cover in polycarbonate (D05P) | <ul style="list-style-type: none"> - Interface cable (HA010301) - Bracket for installation onto mounting rails (HA010203) - Sealing element (HA050309) |
|---|---|

Order Example

EE35-ME025HA03D05C03P01/BC5-T02-Td02

<p>Housing: metal housing Type: pressure tight Cable length: 2m (6.6ft) Probe length: 200mm (7.9") Pressure tight feedthrough: 1/2" male thread Display: yes Alarm output: no Plug: 1 plug for power supply and outputs Sensing probe: pluggable</p>	<p>Td Calibration: standard Output 1: T Output 2: Td Output signal: 0-20mA Measured value unit: metric Scaling of T-output: -40...60°C Scaling of Td-output: -40...60°C</p>
--	---

EE35