

### Specifications for colour video monitor

MODEL	VMC-8619P	VMC-8614P
<b>Colour system</b>	PAL / NTSC, Automatic detection	PAL / NTSC, Automatic detection
<b>CRT</b>	19" 90° deflection	14" 90° deflection
<b>Scanning frequency</b>	H: 15.625 kHz, V: 50 Hz (PAL) H: 15.734 kHz, V: 59.94 Hz (NTSC)	H: 15.625 kHz, V: 50 Hz (PAL) H: 15.734 kHz, V: 59.94 Hz (NTSC)
<b>Horizontal resolution</b>	More than 800 TV lines	More than 750 TV lines
<b>Input terminals</b>	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, negative sync., BNC x 1, bridged-out possible, auto-termination <b>Composite video input B</b> 1.0 V (p-p), 75 Ohms, negative sync., BNC x 1, bridged-out possible, auto-termination <b>S-VIDEO</b> Y: 1.0 V (p-p), 75 Ohms, negative sync. C: 0.3 V (p-p), 75 Ohms (PAL) 0.286 V (p-p), 75 Ohms (NTSC) Mini-DIN 4-pin x 1, bridged-out possible, auto-termination <b>Audio input</b> RCA x 3, bridged-out possible	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, negative sync., BNC x 1, bridged-out possible, auto-termination <b>Composite video input B</b> 1.0 V (p-p), 75 Ohms, negative sync., BNC x 1, bridged-out possible, auto-termination <b>S-VIDEO</b> Y: 1.0 V (p-p), 75 Ohms, negative sync. C: 0.3 V (p-p), 75 Ohms (PAL) 0.286 V (p-p), 75 Ohms (NTSC) Mini-DIN 4-pin x 1, bridged-out possible, auto-termination <b>Audio input</b> RCA x 3, bridged-out possible
<b>Output terminals</b>	Video out A, loop-through, BNC x 1 Video out B, loop-through, BNC x 1 S-Video out, loop-through, Mini-DIN 4-pin x 1 Audio out, loop-through, RCA x 3	Video out A, loop-through, BNC x 1 Video out B, loop-through, BNC x 1 S-Video out, loop-through, Mini-DIN 4-pin x 1 Audio out, loop-through, RCA x 3
<b>Built-in speaker</b>	x 1	x 1
<b>Audio output</b>	1 W	1 W
<b>Power source</b>	100 V to 240 V AC, 50 / 60 Hz	100 V to 240 V AC, 50 / 60 Hz
<b>Power consumption</b>	95 W	82 W
<b>Operating conditions</b>	-10°C to 45°C [14°F to 113°F] (Humidity: 10% to 90% RH)	-10°C to 45°C [14°F to 113°F] (Humidity: 10% to 90% RH)
<b>Dimensions (W x H x D)</b>	448 x 433 x 447 mm [17.64 x 17.05 x 17.6 in.]	350 x 350 x 378 mm [13.78 x 13.78 x 14.88 in.]
<b>Weight</b>	25 kg [55.1 lbs.]	14 kg [30.9 lbs.]

MODEL	VMC-8414P	VMC-8114P
<b>Colour system</b>	PAL	PAL
<b>CRT</b>	14" 90° deflection	14" 90° deflection
<b>Scanning frequency</b>	H: 15.625 kHz, V: 50 Hz	H: 15.625 kHz, V: 50 Hz
<b>Horizontal resolution</b>	More than 700 TV lines	More than 400 TV lines
<b>Input terminals</b>	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided <b>S-VIDEO</b> Y: 1.0 V (p-p), 75 Ohms C: 0.3 V (p-p), 75 Ohms Mini-DIN 4-pin x 1, bridged-out possible, termination switch provided <b>Audio input</b> RCA x 1, bridged-out possible	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided <b>S-VIDEO</b> Y: 1.0 V (p-p), 75 Ohms C: 0.3 V (p-p), 75 Ohms Mini-DIN 4-pin x 1, bridged-out possible, termination switch provided <b>Audio input</b> RCA x 1, bridged-out possible
<b>Output terminals</b>	Video out, loop-through, BNC x 1 S-VIDEO out, loop-through, Mini-DIN 4-pin x 1 Audio out, loop-through, RCA x 1	Video out, loop-through, BNC x 1 S-VIDEO out, loop-through, Mini-DIN 4-pin x 1 Audio out, loop-through, RCA x 1
<b>Built-in speaker</b>	x 1	x 1
<b>Audio output</b>	1 W	1 W
<b>Power source</b>	100 V to 240 V AC, 50 / 60 Hz	100 V to 240 V AC, 50 / 60 Hz
<b>Power consumption</b>	80 W	60 W
<b>Operating conditions</b>	-10°C to 50°C [14°F to 122°F] (Humidity: 10% to 90% RH)	-10°C to 40°C [14°F to 104°F] (Humidity: 10% to 90% RH)
<b>Dimensions (W x H x D)</b>	350 x 350 x 378 mm [13.78 x 13.78 x 14.88 in.]	350 x 350 x 378 mm [13.78 x 13.78 x 14.88 in.]
<b>Weight</b>	14 kg [30.9 lbs.]	14 kg [30.9 lbs.]



\*Specifications subject to change without notice

### Specifications for B/W video monitor

MODEL	VM-6620P	VM-6615P
<b>Television system</b>	CCIR	CCIR
<b>CRT</b>	20" 90° deflection	15" 90° deflection
<b>Scanning frequency</b>	H: 15.625 kHz, V: 50 Hz	H: 15.625 kHz, V: 50 Hz
<b>Horizontal resolution</b>	1000 TV lines and over at center	1000 TV lines and over at center
<b>Input terminals</b>	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided <b>Composite video input B</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided <b>Composite video input B</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided
<b>Output terminals</b>	Video out A, loop-through, BNC x 1 Video out B, loop-through, BNC x 1	Video out A, loop-through, BNC x 1 Video out B, loop-through, BNC x 1
<b>Power source</b>	100 V to 240 V AC, 50 / 60 Hz	100 V to 240 V AC, 50 / 60 Hz
<b>Power consumption</b>	36 W	35 W
<b>Operating conditions</b>	-10°C to 40°C [14°F to 104°F] (Humidity: 10% to 90% RH)	-10°C to 40°C [14°F to 104°F] (Humidity: 10% to 90% RH)
<b>Dimensions (W x H x D)</b>	472 x 450 x 360 mm [18.58 x 17.72 x 14.17 in.]	350 x 350 x 360 mm [13.78 x 13.78 x 14.17 in.]
<b>Weight</b>	19 kg [41.9 lbs.]	11 kg [24.3 lbs.]

MODEL	VM-6612P	VM-6609P
<b>Television system</b>	CCIR	CCIR
<b>CRT</b>	12" 90° deflection	9" 90° deflection
<b>Scanning frequency</b>	H: 15.625 kHz, V: 50 Hz	H: 15.625 kHz, V: 50 Hz
<b>Horizontal resolution</b>	800 TV lines and over at center	800 TV lines and over at center
<b>Input terminals</b>	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided <b>Composite video input B</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided	<b>Composite video input A</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided <b>Composite video input B</b> 1.0 V (p-p), 75 Ohms, BNC x 1, bridged-out possible, termination switch provided
<b>Output terminals</b>	Video out A, loop-through, BNC x 1 Video out B, loop-through, BNC x 1	Video out A, loop-through, BNC x 1 Video out B, loop-through, BNC x 1
<b>Power source</b>	100 V to 240 V AC, 50 / 60 Hz	100 V to 240 V AC, 50 / 60 Hz
<b>Power consumption</b>	30 W	20 W
<b>Operating conditions</b>	-10°C to 40°C [14°F to 104°F] (Humidity: 10% to 90% RH)	-10°C to 40°C [14°F to 104°F] (Humidity: 10% to 90% RH)
<b>Dimensions (W x H x D)</b>	304 x 320 x 310 mm [11.97 x 12.6 x 12.2 in.]	222 x 238 x 250 mm [8.74 x 9.37 x 9.84 in.]
<b>Weight</b>	7.5 kg [16.5 lbs.]	4.5 kg [9.9 lbs.]

\*Specifications subject to change without notice

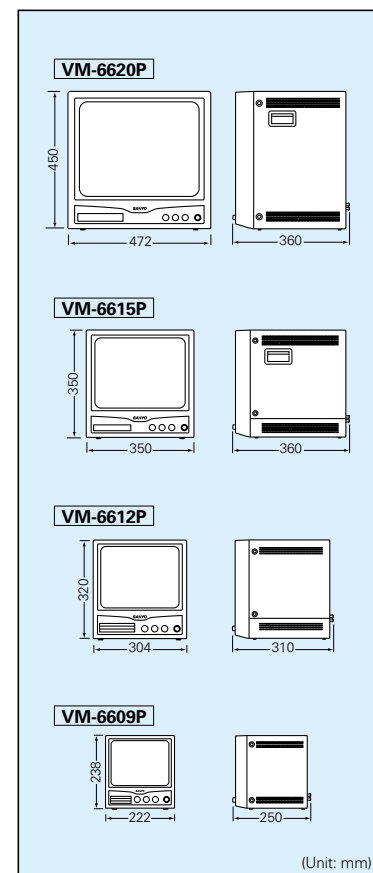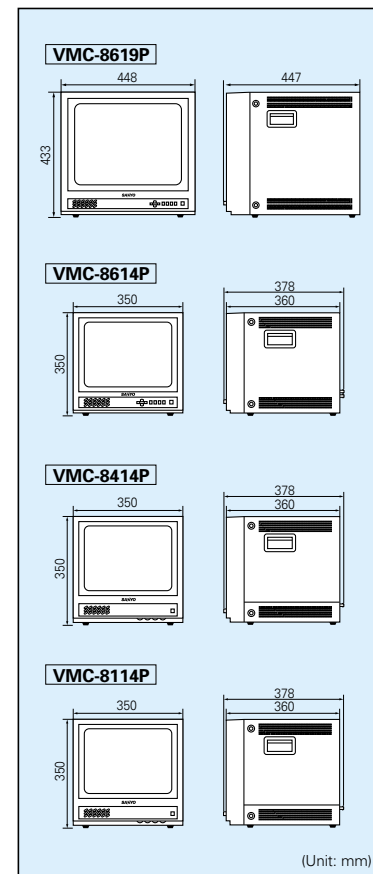

## Video Monitor

Colour



Black & White



**\*Caution:** please consult the instruction manual to ensure safe and proper operation of the product.

\*Television inset image is simulated.

Distributed by:



SANYO Electric Co., Ltd.  
Video Imaging Systems Division  
©2001 SANYO 01.4. AP



## Colour Video Monitor

### Common features

- S-VIDEO input and output terminals
- Built-in compact loudspeaker (1 W)
- Automatic voltage selector, 100V to 240V AC
- Durable metal cabinet
- Images signal input / output terminal allows a bridge connection

### Super High-resolution



19" High-resolution Colour Video Monitor **VMC-8619P**

- More than 800 TV lines of horizontal resolution
- Three channels of audio and video input, — selectable from the front panel
- Overscan / underscan selectable from the front panel
- On-screen mode setting, menu languages built in: English / French / Germany / Spanish / Italian / Russian
- EIA Rack mountable

### Super High-resolution



14" High-resolution Colour Video Monitor **VMC-8614P**

- More than 750 TV lines of horizontal resolution
- Three channels of audio and video input, — selectable from the front panel, sequential display also available
- On-screen mode setting, menu languages built in: English / French / Germany / Spanish / Italian / Russian

### High-resolution



14" High-resolution Colour Video Monitor **VMC-8414P**

- More than 700 TV lines of horizontal resolution



14" Colour Video Monitor **VMC-8114P**

- More than 400 TV lines of horizontal resolution

### Super high-resolution system of the future

This advanced system handles the entire process from shooting to recording in super high-resolution mode, as all equipment (camera, multiplexer, VCR, and monitor) adheres to the same standard. Live pictures with a horizontal resolution of 520 TV lines are captured by VCC-6572P / VCC-6574P and fed to your monitor as super high-resolution images. The DTL-4800P also makes it possible to record these super high-resolution images using its digital recording technology.



## B/W Video Monitor

### Common features

- High-performance black & white monitor
- Two channels of video input, — selectable from the front panel
- Automatic voltage selector, 100V to 240V AC
- Durable metal cabinet
- Images signal input / output terminal allows a bridge connection



20" B/W Video Monitor **VM-6620P**

- More than 1000 TV lines of horizontal resolution



15" B/W Video Monitor **VM-6615P**

- More than 1000 TV lines of horizontal resolution



12" B/W Video Monitor **VM-6612P**

- More than 800 TV lines of horizontal resolution



9" B/W Video Monitor **VM-6609P**

- More than 800 TV lines of horizontal resolution
- 2 sets side-by-side 19" rack mountable

### Monitor Bridge Connection

To display camera images on several monitors, simply bridge connect the monitors. Please use RG-59U / RG-6U coaxial cable to minimize deterioration of the signal. With VMC-8414P, VMC-8114P, VM-6620P, VM-6615P, VM-6612P, and VM-6609P, set the input impedance switch at the end only to 75 Ohms, and set all the rest to "HIGH". VMC-8619P, and VMC-8614P, have auto-termination.

